




Motorola Defy XT Camera Replacement

This guide shows how to remove and install the Motorola Defy XT integrated camera

Written By: Mustapha Nadri

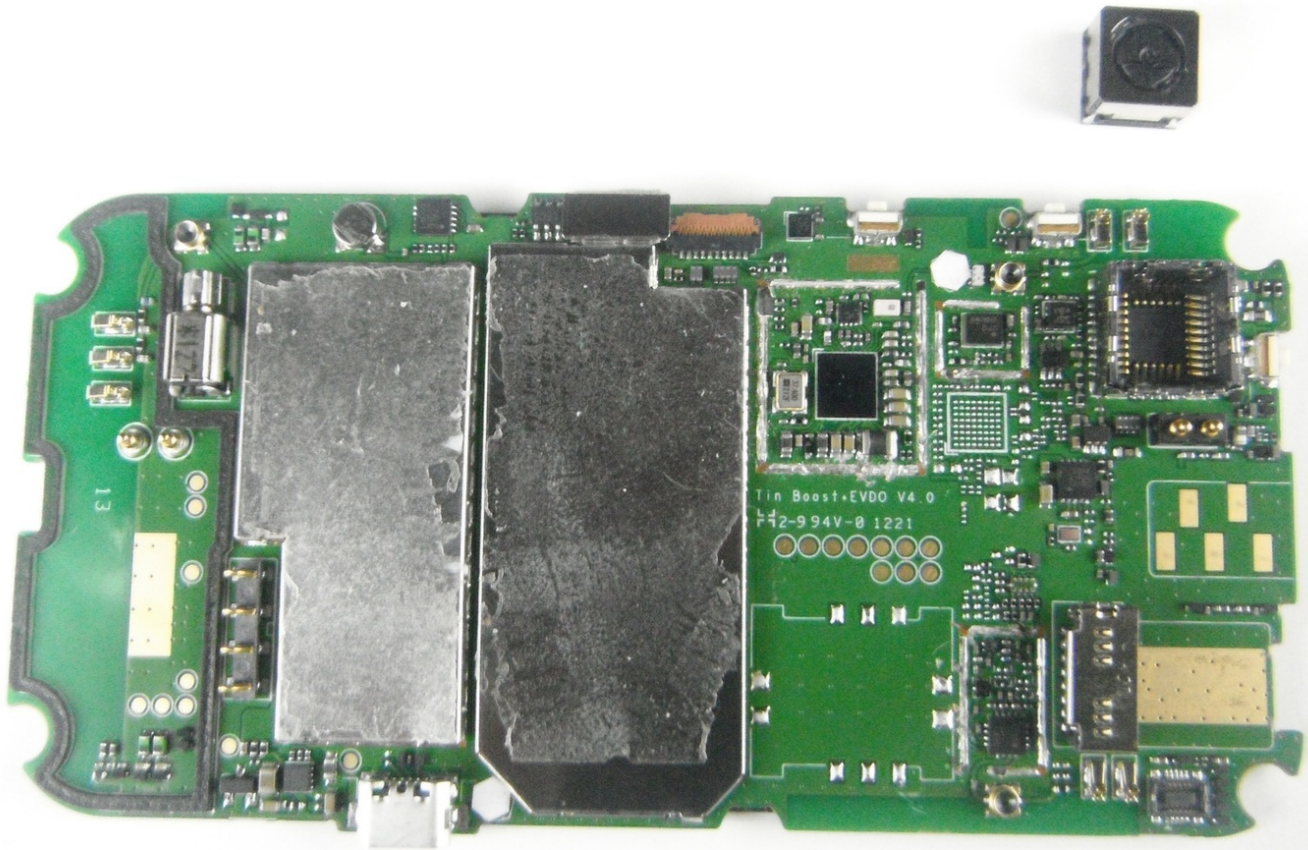



TOOLS:

- [T4 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Camera



- Wedge the opening tool in between the back cover and the body of the phone in the opening denoted by the arrow.

Step 2



- Once wedged in the opening, slide the plastic opening tool sideways around the sides of the phone.

Step 3



- Insert the opening tool in between the battery and the battery holder and wedge the battery out.

Step 4




- Open the plastic cover with your finger exposing the SD Card
- Use a plastic opening tool to grab the edge of the SD card and pull it straight out.

Step 5




- Use the opening tool to grab the edge of the SD Card and pull it straight out.

Step 6

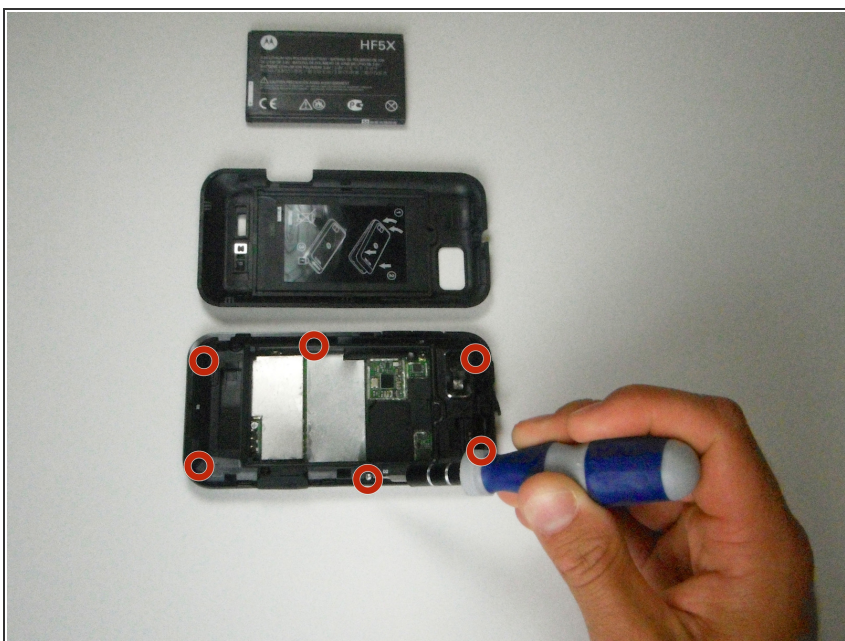


- Use the T4 torque driver to remove the 6 3mm diameter screws

Step 7

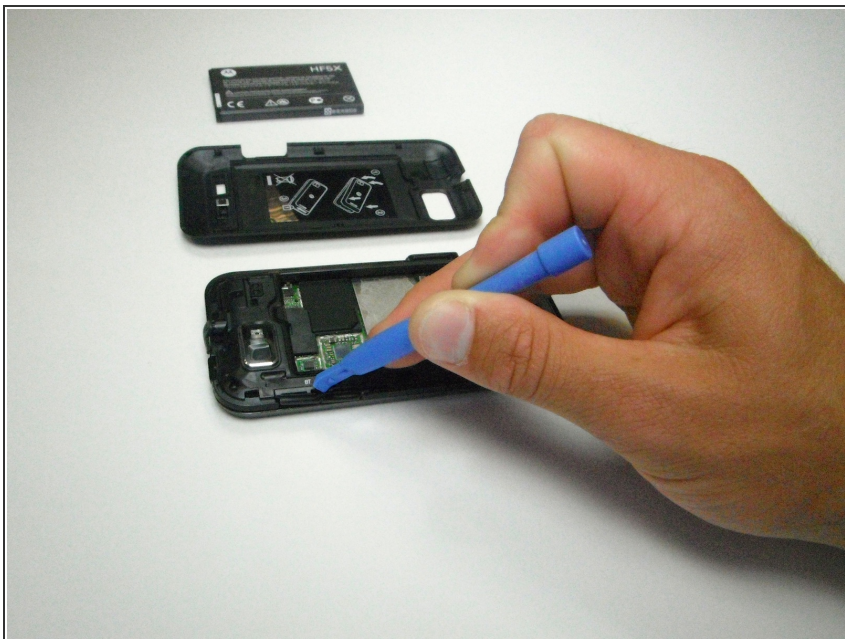


- Use the opening tool to pop the volume buttons off

Step 8

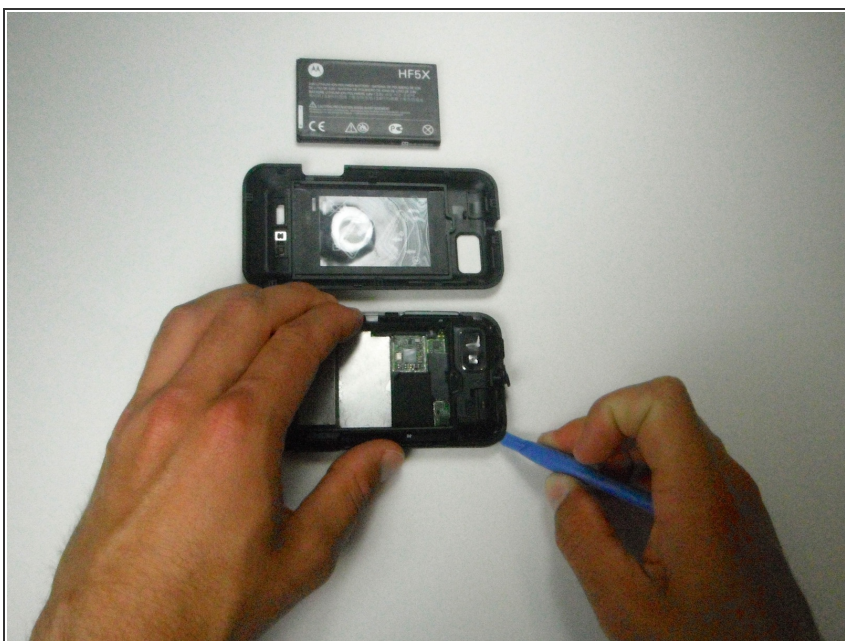


- Slide the opening tool along the edge wedging the two pieces apart
- Caution: Be careful to not to rip the ribbon that is holding the two pieces

Step 9

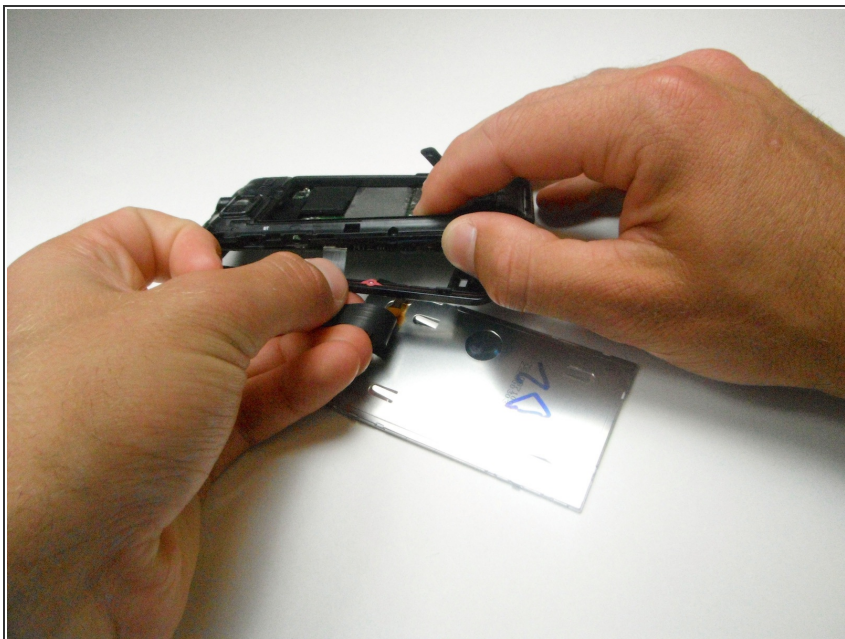


- Disconnect the ribbon connector, and slide out the screen.

Step 10

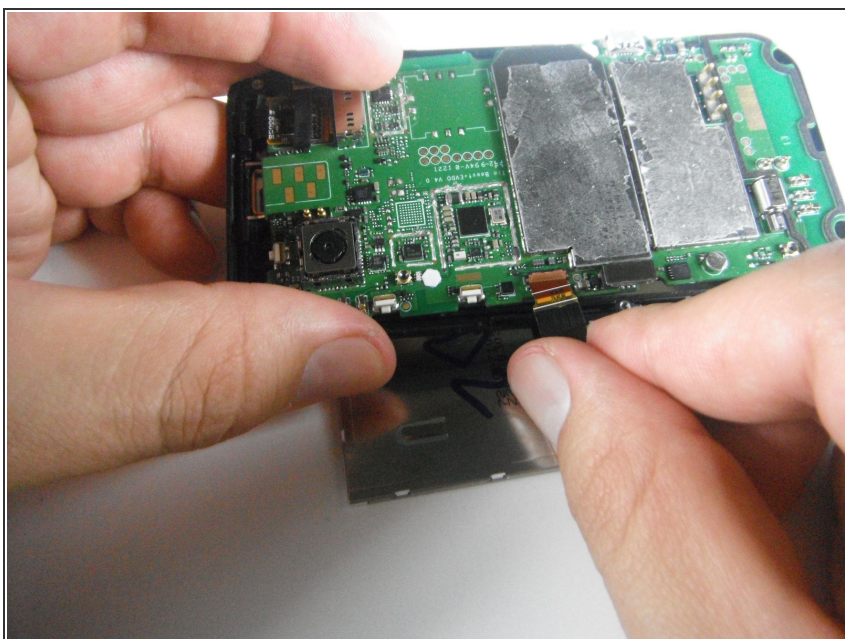


- Flip the mother board over and disconnect the ribbon cable connecting the display to the logic board by pulling straight outward with, using the opening tool

Step 11

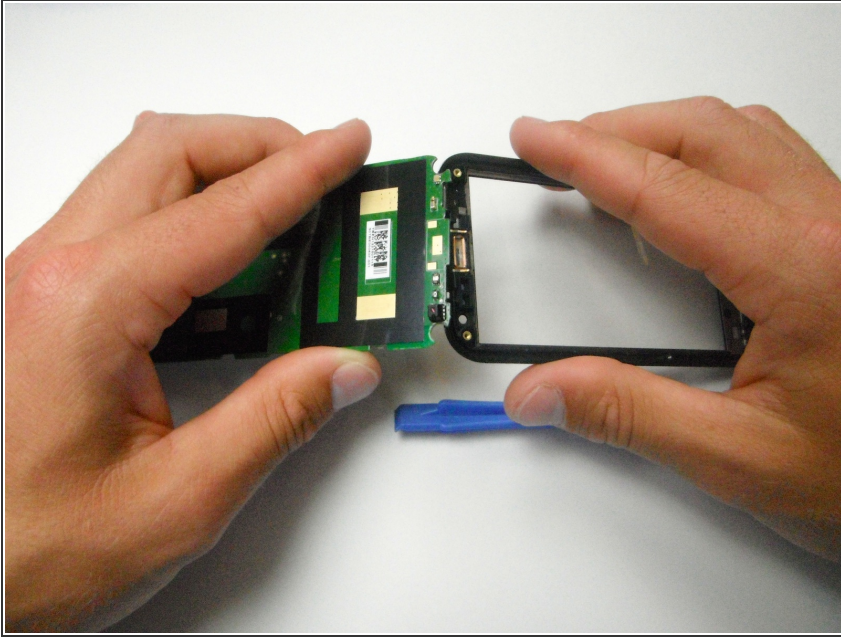

- 13. Pull the two halves of the device apart to disconnect the second (wider) ribbon connector.
- Note: The ribbon connector is bonded to the logic board with adhesive, simply pull it off

Step 12

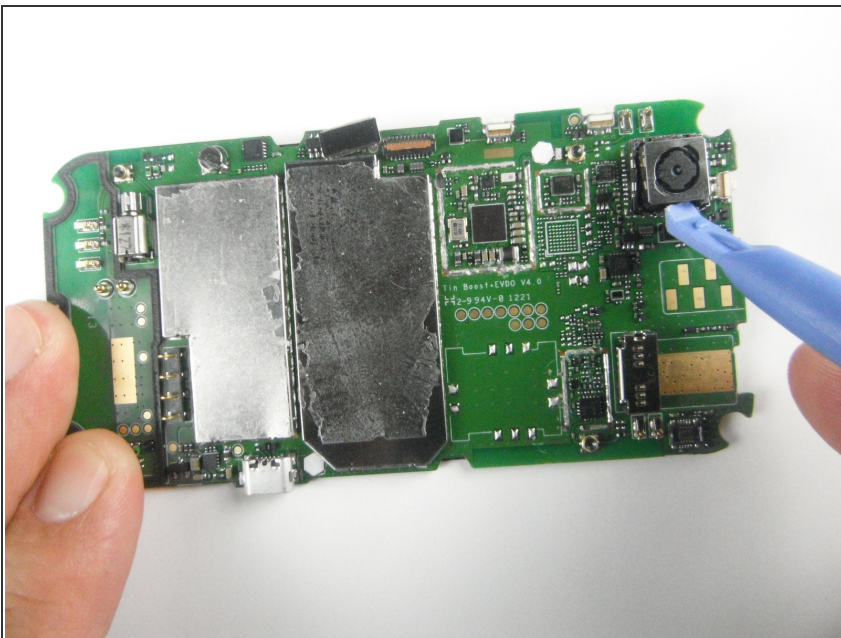

- Flip the mother board over, and use the opening tool to disconnect the camera from the logic board

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 08:04:17 AM.